


3-PART RUNG STEPLADDER AND EXTENSION LADDER, 3 X 10 RUNGS

Article number: 146210

3-section rung stepladder and extension ladder, insulating up to 1000 V AC/1500 V DC. Combined three-part rung ladder that can be used both as a stepladder and as an extension ladder (single ladder). When used as a stepladder, the third upper ladder section serves only as a safety bridge. Optimum stability due to floor crossbar, sliding ladder height adjustable from rung to rung by hand, 2 wall rollers at the top end of the ladder, locking and opening mechanism made of aluminum, high-strength tension

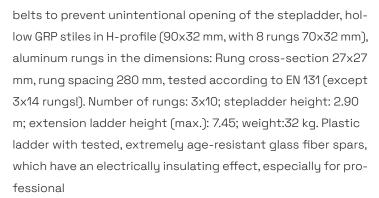

users who work near cables, connections or other current-carrying equipment. Lightweight and easy to handle thanks to the special design of the GRP uprights (hollow or C-profile) and aluminum rungs or steps, rungs and steps permanently flanged twice to the uprights, rung spacing 280 mm: Load capacity 150 kg, non-slip stand due to rubber ladder shoes, including detailed operating, assembly and safety instructions. Ladders comply with European standard EN 131 and electrical tests according to DIN 53

Attribute	Value
Material	Glasfaser/Aluminium
Execution	Schiebeleiter
With wheels	No
With leash	No
With stabilizers	No



CIMCO Werkzeuge GmbH & Co. KG Hohenhagener Straße 1 – 5 42855 Remscheid Telefon +49 2191 3718-01 info@cimco.de • cimco.de



With platform	No
Load capacity	150
Number of elements	3
Transport length	2,9
Number of rungs	10
Rated voltage DC	1500
Rated voltage AC	1000
Complies with EN 50528	No
With mast adapter	No

GTIN: 4021103462102

CIMCO Werkzeuge GmbH & Co. KG Hohenhagener Straße 1 – 5 42855 Remscheid Telefon +49 2191 3718-01 info@cimco.de • cimco.de