


3-PART RUNG STEPLADDER AND EXTENSION LADDER, 3 X 12 RUNGS

Article number: 146212

3-section rung stepladder and extension ladder, insulating up to 1000 V AC/1500 V DC. Combined three-part rung ladder that can be used both as a stepladder and as an extension ladder (single ladder). When used as a stepladder, the third upper ladder section serves only as a safety bridge. Optimum stability due to floor crossbar, sliding ladder height adjustable from rung to rung by hand, 2 wall rollers at the top end of the ladder, locking and opening mechanism made of aluminum, high-strength tension

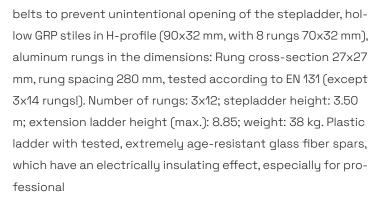

users who work near cables, connections or other current-carrying equipment. Lightweight and easy to handle thanks to the special design of the GRP uprights (hollow or C-profile) and aluminum rungs or steps, rungs and steps permanently flanged twice to the uprights, rung spacing 280 mm: Load capacity 150 kg, non-slip stand due to rubber ladder shoes, including detailed operating, assembly and safety instructions. Ladders comply with European standard EN 131 and electrical tests according to DIN 53

	Attribute	Value
	Material	Glasfaser/Aluminium
	Execution	Schiebeleiter
	With wheels	No
	With leash	No
	With stabilizers	No



CIMCO Werkzeuge GmbH & Co. KG Hohenhagener Straße 1 – 5 42855 Remscheid Telefon +49 2191 3718-01 info@cimco.de • cimco.de



With platform No Load capacity 150 Number of elements 3 Transport length 3,5 Number of rungs 12 Rated voltage DC 1500 1000 Rated voltage AC Complies with EN 50528 No With mast adapter No

GTIN: 4021103462126

CIMCO Werkzeuge GmbH & Co. KG Hohenhagener Straße 1 – 5 42855 Remscheid Telefon +49 2191 3718-01 info@cimco.de • cimco.de