


COMBINATION BIT PZ2 FL

Article number: 114942

Module bit for combined slotted/crosshead screws on electrical installations, e.g. terminal strips; PZ FL2, dimensions: 70 mm. The damping zone (only for bits in 25 mm length between drive and working tip consumes excess force peaks, which previously led to high wear and destructive ejection forces. The FLEX zone gives the BITFLEX a significantly increased service life compared to conventional standard bits. Bit with 1/4" hex drive.

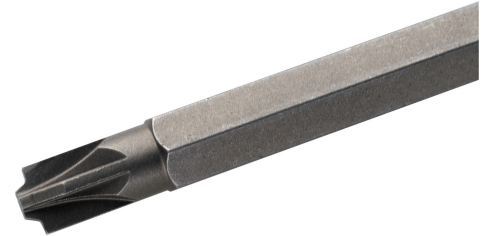

Length (mm)	70 mm
Width (mm)	7 mm
Height (mm)	7 mm
Weight (kg)	0,015 kg

Attribute	Value
Protective insulation 1000 V	No
Total length	70 mm
Two-sided	No
Spring ball mounting	No
Connection dimension	1/4 Zoll mm
Suitable for use with impact	No
With hole	No
Size	2
Type of crosshead	Pozidriv PZ
Screw system	sonstige
Bit size	- mm
Blade width	- mm
Width across flats	- mm
Blade thickness	- mm
Connection dimension	EV006239

GTIN: 4021103149423

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de