


PARALLEL CONNECTOR, INSULATED CROSS-SECTION 0.5 - 1 MM²
Article number: 180320

Parallel connector, insulated- Technical data: Material: Cu-ETP according to DIN EN 13600 - Surface: electro-tinned - For strain-relieved connections - Insulation PVC/PE - Temperature resistance -40°C to +70°C. Cross section 0.5-1 mm², insulation material: PVC; insulation color: red; L1: 18; L2: 8; D1: 1.6; weight per 100 pcs ~kg: 0.07; UL listed: x; PU/pc. 100.

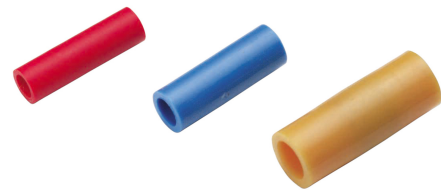

Length (mm)	150 mm
Width (mm)	85 mm
Height (mm)	7 mm
Weight (kg)	0,00069 kg

Attribute	Value
Surface protection	verzinkt
Material	Kupfer
Execution	Normalausführung
Connection type	Parallelverbinder
Suitable for solid conductors	No
Suitable for stranded conductors	Yes
Suitable for fine-stranded conductors	Yes
Sleeve shape	kurz
Insulation	Polyamid (PA)
Nominal cross-section	0.5 mm ² - 1 mm ²
For tensile strength connections	No
Suitable for round conductors	Yes
Suitable for high temperatures (up to 650 °C)	No
Suitable for flat conductors	No
Suitable for enameled wire	No
Color of the insulation	rot
Oil stop/center bar	No
Voltage series	bis 230/380 V
Number of branches	2
Rated current	- A

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de



GTIN: 4021103803202

CIMCO Werkzeuge GmbH & Co. KG
Hohenhagener Straße 1 – 5
42855 Remscheid
Telefon +49 2191 3718-01
info@cimco.de • cimco.de