


PARALLEL CONNECTOR, INSULATED, CROSS-SECTION 4 - 6 MM²
Article number: 180324

Parallel connector, insulated- Technical data: Material: Cu-ETP according to DIN EN 13600 - Surface: galvanically tinned - For strain-relieved connections - Insulation PVC/PE - Temperature resistance -40°C to +70°C. Cross section 4-6 mm², insulation material: PVC; insulation color: yellow; L1: 21; L2: 9; D1: 3,6; weight per 100 pcs. ~kg; 0,14; UL-listed: -; PU/pc. 100.

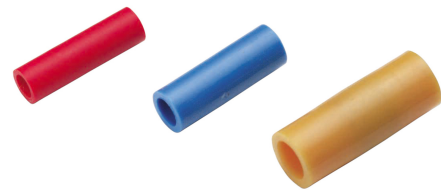

Length (mm)	140 mm
Width (mm)	85 mm
Height (mm)	26 mm
Weight (kg)	0,0014 kg

Attribute	Value
Surface protection	verzinkt
Material	Kupfer
Execution	Normalausführung
Connection type	Parallelverbinder
Suitable for solid conductors	No
Suitable for stranded conductors	Yes
Suitable for fine-stranded conductors	Yes
Sleeve shape	kurz
Insulation	Polyamid (PA)
Nominal cross-section	4 mm ² - 6 mm ²
For tensile strength connections	No
Suitable for round conductors	Yes
Suitable for high temperatures (up to 650 °C)	No
Suitable for flat conductors	No
Suitable for enameled wire	No
Color of the insulation	gelb
Oil stop/center bar	No
Voltage series	bis 230/380 V
Number of branches	2
Rated current	- A

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de



GTIN: 4021103803240

CIMCO Werkzeuge GmbH & Co. KG
Hohenhagener Straße 1 – 5
42855 Remscheid
Telefon +49 2191 3718-01
info@cimco.de • cimco.de