


BUTT CONNECTOR, INSULATED, 0.1 - 0.4 MM²**Article number: 180328**

Butt connector, insulated - Technical data - Material: Cu-ETP according to DIN EN 13600 - Surface: electro-tinned - For strain-relieved connections - Insulation PA (polyamide, nylon), halogen-free - Temperature resistance -60°C to +105°C - 600 V max; Easy Entry enables simple and fast insertion of the conductor; not suitable for solid conductors. Cross section: 0.1-0.4 mm²; Insulation color: yellow; L1: 20; L2: 11; D1: 1; Weight per 100 pcs ~kg: 0.04; Packs of 100

Length (mm)	150 mm
Width (mm)	110 mm
Height (mm)	4 mm
Weight (kg)	0,00037 kg

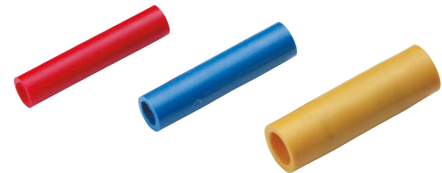

CIMCO Werkzeuge GmbH & Co. KG
Hohenagener Straße 1 – 5
42855 Remscheid
Telefon +49 2191 3718-01
info@cimco.de • cimco.de

Attribute	Value
Surface protection	verzinkt
Material	Kupfer
Execution	Normalausführung
Connection type	Stoßverbinder
Suitable for solid conductors	No
Suitable for stranded conductors	Yes
Suitable for fine-stranded conductors	Yes
Sleeve shape	lang
Insulation	Polyamid (PA)
Nominal cross-section	1 mm ² - 4 mm ²
For tensile strength connections	No
Suitable for round conductors	Yes
Suitable for high temperatures (up to 650 °C)	No
Suitable for flat conductors	No
Suitable for enameled wire	No
Color of the insulation	gelb
Oil stop/center bar	No
Voltage series	bis 230/380 V
Number of branches	2
Rated current	- A

GTIN: 4021103803288

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de