


**INSULATED BUTT CONNECTOR, 0.5 - 1 MM<sup>2</sup>****Article number: 180330**

---

Butt connector, insulated - Technical data - Material: Cu-ETP according to DIN EN 13600 - Surface: electro-tinned - For strain-relieved connections - Insulation PA (polyamide, nylon), halogen-free - Temperature resistance -60°C to +105°C - 600 V max; Easy Entry enables simple and fast insertion of the conductor; not suitable for solid conductors. Cross-section: 0.5-1 mm<sup>2</sup>; Insulation color: red; L1: 25; L2: 15; D1: 1.6; Weight per 100 pcs ~kg: 013; Packs of 100

Length (mm)	150 mm
Width (mm)	85 mm
Height (mm)	7 mm
Weight (kg)	0,00125 kg

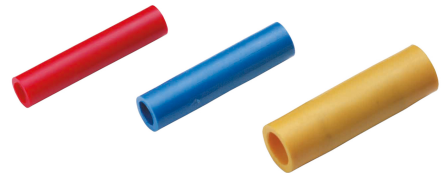

CIMCO Werkzeuge GmbH & Co. KG  
Hohenagener Straße 1 – 5  
42855 Remscheid  
Telefon +49 2191 3718-01  
info@cimco.de • cimco.de

Attribute	Value
Surface protection	verzinkt
Material	Kupfer
Execution	Normalausführung
Connection type	Stoßverbinder
Suitable for solid conductors	No
Suitable for stranded conductors	Yes
Suitable for fine-stranded conductors	Yes
Sleeve shape	lang
Insulation	Polyamid (PA)
Nominal cross-section	0.5 mm <sup>2</sup> - 1 mm <sup>2</sup>
For tensile strength connections	No
Suitable for round conductors	Yes
Suitable for high temperatures (up to 650 °C)	No
Suitable for flat conductors	No
Suitable for enameled wire	No
Color of the insulation	rot
Oil stop/center bar	No
Voltage series	bis 230/380 V
Number of branches	2
Rated current	- A

GTIN: 4021103803301

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de