


**HEAT-SHRINK TUBING 2:1, BLACK, RAL 9011, THIN-WALLED, Ø 5.0/2.3 MM, LENGTH 1 M**
**Article number: 181622**

Polyolefin heat shrink tubing, thin wall design 2:1, black, halogen free and flexible, flame retardant (VW-1/UI224). Technical data: Longitudinal shrinkage: < 5%, Continuous temperature: -55 to 125°C, Shrink temperature: 125°C, Dielectric strength: 15 kV/mm (IEC243), Volume resistivity: 10<sup>14</sup> ohms x cm (IEC93), Tensile strength: 10.4 MPa (ASTM D2671).

Elongation at break: 200 % (ASTM D2671) Ø- in mm; before: 5,0; after: 2,3; Color: black; Wall thickness: 0,56 mm; Length: 1 m;

Packing unit: 1 piece

Length (mm) 0 mm  
 Width (mm) 0 mm  
 Height (mm) 0 mm  
 Weight (kg) 0,021 kg

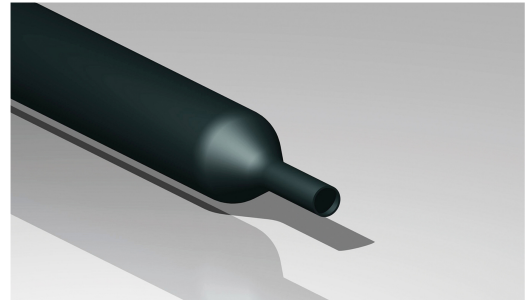

Attribute	Value
Length	1 m
Material	Polyolefine (PO-X)
Color	schwarz
Execution	dünnwandig
Halogen-free	Yes
Transparent	No
Type	Warmshrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	19.63 mm <sup>2</sup> - 19.63 mm <sup>2</sup>
Shrinkage rate	2:1
With inside adhesive	No
Inner diameter after shrinkage	2.3 mm
Inner diameter before shrinkage	5 mm
Printable	No
Wall thickness after shrinkage	0.56 mm

GTIN: 4021103067277

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de