


HEAT-SHRINK TUBING 2:1, BLACK, RAL 9011, THIN-WALLED, Ø 50.0/25.0 MM, LENGTH 5 M
Article number: 181630

Polyolefin heat shrink tubing, thin wall design 2:1, black, halogen free and flexible, flame retardant (VW-1/UI224). Technical data: Longitudinal shrinkage: < 5%, Continuous temperature: -55 to 125°C, Shrink temperature: 125°C, Dielectric strength: 15 kV/mm (IEC243), Volume resistivity: 10¹⁴ ohms x cm (IEC93), Tensile strength: 10.4 MPa (ASTM D2671).

Elongation at break: 200 % (ASTM D2671) Ø- in mm; before: 50,0; after: 25,0; Color: black; Wall thickness: 1,00 mm; Length: 5 m;

Packing unit: 1 piece

| | |
|-------------|--------|
| Length (mm) | 0 mm |
| Width (mm) | 0 mm |
| Height (mm) | 0 mm |
| Weight (kg) | 0,5 kg |

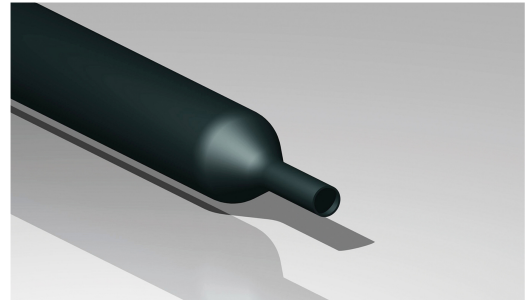

| Attribute | Value |
|---------------------------------|---|
| Length | 5 m |
| Material | Polyolefine (PO-X) |
| Color | schwarz |
| Execution | dünnwandig |
| Halogen-free | Yes |
| Transparent | No |
| Type | Warmschrumpf |
| Operating temperature | -45 °C - 125 °C |
| Nominal cross-section | 1963.5 mm ² - 1963.5 mm ² |
| Shrinkage rate | 2:1 |
| With inside adhesive | No |
| Inner diameter after shrinkage | 25 mm |
| Inner diameter before shrinkage | 50 mm |
| Printable | No |
| Wall thickness after shrinkage | 1 mm |

GTIN: 4021103067437

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de