


**HEAT-SHRINK TUBING 2:1, GREEN/YELLOW, THIN-WALLED, Ø 2.5/1.0 MM, LENGTH 11.5 M**
**Article number: 181640**

Polyolefin heat shrink tubing, thin wall design 2:1, colored, halogen free and flexible, flame retardant (VW-1/UI224). Technical data: Longitudinal shrinkage: < 5%, Continuous temperature: -55 to 125°C, Shrinkage temperature: 125°C, Dielectric strength: 15 kV/mm (IEC243), Volume resistivity: 10<sup>14</sup> Ohm x cm (IEC93), Tensile strength: 10.4 MPa (ASTM D2671).

Elongation at break: 200 % (ASTM D2671) Ø- in mm; before: 2,5; after: 1,0; Color: green/yellow; Wall thickness: 0,45 mm; Length: 11,50 m; Packing unit: 1 box

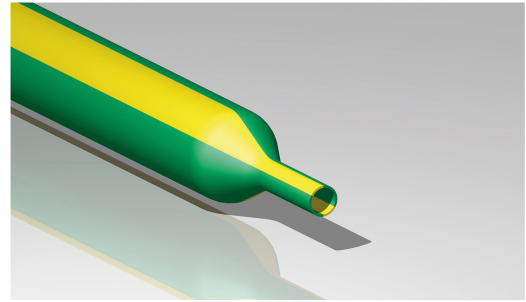

Length (mm)	190 mm
Width (mm)	150 mm
Height (mm)	50 mm
Weight (kg)	0,098 kg

Attribute	Value
Length	11.5 m
Material	Polyolefine (PO-X)
Color	grün/gelb
Execution	dünnwandig
Halogen-free	Yes
Transparent	No
Type	Warmschrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	4.91 mm <sup>2</sup> - 4.91 mm <sup>2</sup>
Shrinkage rate	2:1
With inside adhesive	No
Inner diameter after shrinkage	1 mm
Inner diameter before shrinkage	2.5 mm
Printable	No
Wall thickness after shrinkage	0.45 mm

GTIN: 4021103067499

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de