


HEAT-SHRINK TUBING 2:1, GREEN/YELLOW, THIN-WALLED, Ø 41.5/20.0 MM, LENGTH 5 M
Article number: 181648

Polyolefin heat shrink tubing, thin wall design 2:1, colored, halogen free and flexible, flame retardant (VW-1/UI224). Technical data: Longitudinal shrinkage: < 5%, Continuous temperature: -55 to 125°C, Shrinkage temperature: 125°C, Dielectric strength: 15 kV/mm (IEC243), Volume resistivity: 10¹⁴ Ohm x cm (IEC93), Tensile strength: 10.4 MPa (ASTM D2671).

Elongation at break: 200 % (ASTM D2671) Ø- in mm; before: 41,5; after: 20,0; Color: green/yellow; Wall thickness: 1,00 mm; Length: 5 m; Packing unit: 1 piece

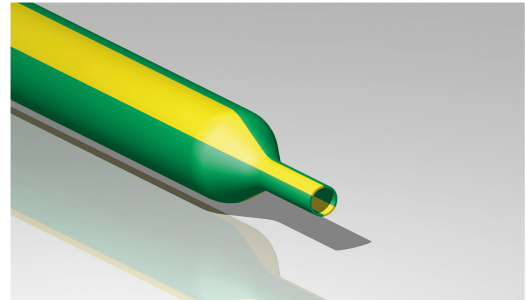

Length (mm) 0 mm
 Width (mm) 0 mm
 Height (mm) 0 mm
 Weight (kg) 0,35 kg

Attribute	Value
Length	5 m
Material	Polyolefine (PO-X)
Color	grün/gelb
Execution	dünnwandig
Halogen-free	Yes
Transparent	No
Type	Warmschrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	1352.65 mm ² - 1352.65 mm ²
Shrinkage rate	2:1
With inside adhesive	No
Inner diameter after shrinkage	20 mm
Inner diameter before shrinkage	41,5 mm
Printable	No
Wall thickness after shrinkage	1 mm

GTIN: 4021103067659

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de