


**FERRULE INSULATED CROSS-SECTION/SLEEVE LENGTH 6.0 MM<sup>2</sup>/12 MM**
**Article number: 182350**

Insulated ferrules according to DIN 46228, part 4 and special dimensions. Technical data - Material: Cu-ETP according to DIN EN 13600 - Surface: electro-tinned - Insulation polypropylene - Temperature resistance -35°C to +105°C - For easy plugging onto fine-stranded copper conductors, prevents damage and splicing. Design: cross section: 6 mm<sup>2</sup>; length without insulation L2: 12 mm; total length L1: 20 mm; D1: 3.5; S1: 0.2; S2: 0.3; D2: 6.3; insulation color: yellow; weight per 100 pcs. ~kg: 0.06; UL listed: x; PU/pc.: 100.

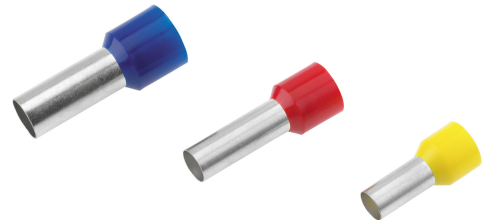

Length (mm)	175 mm
Width (mm)	100 mm
Height (mm)	11 mm
Weight (kg)	0,00044 kg

Attribute	Value
Nominal cross-section	6 mm <sup>2</sup>
Surface protection	verzinkt
Material	Kupfer
Color	gelb
Insulated	Yes
Halogen-free	Yes
Strip goods	No
Total length	20 mm
Design	Standard
For short-circuit-proof cables	No
Insulation material	Polypropylen (PP)
Sleeve length	12 mm
With identification flag	No
AWG size	10

GTIN: 4021103823507

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de