


**FERRULE INSULATED CROSS-SECTION/SLEEVE LENGTH 25.0 MM<sup>2</sup>/22 MM**
**Article number: 182364**

Insulated wire end ferrules to DIN 46228, part 4 and special dimensions. Technical data - Material: Cu-ETP to DIN EN 13600 - Surface: electro-tinned - Polypropylene insulation - Temperature resistance -35°C to +105°C - For easy fitting on fine-stranded copper conductors, prevents damage and splicing. Design: Cross-section: 25 mm<sup>2</sup>; Length without insulation L2: 22 mm; Total length L1: 36 mm; D1: 7.3; S1: 0.2; S2: 0.4; D2: 11.2; Insulation color: yellow; Weight per 100 pcs ~ kg: 0.16; UL listed: x; PU/pc: 50.

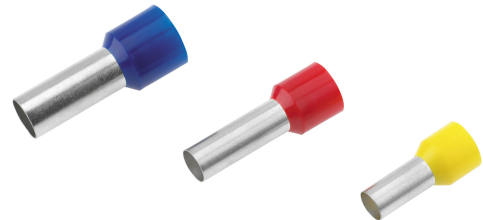

Length (mm)	190 mm
Width (mm)	130 mm
Height (mm)	16 mm
Weight (kg)	0,0016 kg

Attribute	Value
Nominal cross-section	25 mm <sup>2</sup>
Surface protection	verzinkt
Material	Kupfer
Color	gelb
Insulated	Yes
Halogen-free	Yes
Strip goods	No
Total length	36 mm
Design	Standard
For short-circuit-proof cables	No
Insulation material	Polypropylen (PP)
Sleeve length	22 mm
With identification flag	No
AWG size	4

GTIN: 4021103823644

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de