


**FERRULE INSULATED CROSS-SECTION/SLEEVE LENGTH 50.0 MM<sup>2</sup>/25 MM**
**Article number: 182372**

Insulated ferrules according to DIN 46228, part 4 and special dimensions. Technical data - Material: Cu-ETP according to DIN EN 13600 - Surface: electro-tinned - Insulation polypropylene - Temperature resistance -35°C to +105°C - For easy plugging onto fine-stranded copper conductors, prevents damage and splicing. Design: cross-section: 50 mm<sup>2</sup>; length without insulation L2: 25 mm; total length L1: 40 mm; D1: 10.3; S1: 0.3; S2: 0.5; D2: 15; insulation color: blue; weight per 100 pcs.: 0.35; UL listed: x; packing unit: 50.

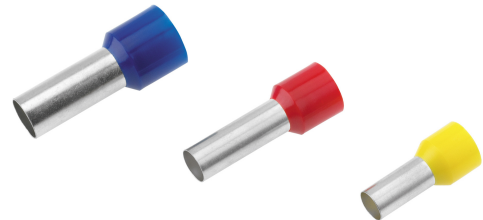

Length (mm) 217 mm  
 Width (mm) 193 mm  
 Height (mm) 23 mm  
 Weight (kg) 0,00348 kg

Attribute	Value
Nominal cross-section	50 mm <sup>2</sup>
Surface protection	verzinkt
Material	Kupfer
Color	blau
Insulated	Yes
Halogen-free	Yes
Strip goods	No
Total length	40 mm
Design	Standard
For short-circuit-proof cables	No
Insulation material	Polypropylen (PP)
Sleeve length	25 mm
With identification flag	No
AWG size	0

GTIN: 4021103823729

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de