


FERRULE INSULATED CROSS-SECTION/SLEEVE LENGTH 120.0 MM²/27 MM
Article number: 182378

Insulated ferrules according to DIN 46228, part 4 and special dimensions. Technical data - Material: Cu-ETP according to DIN EN 13600 - Surface: electro-tinned - Insulation polypropylene - Temperature resistance -35°C to +105°C - For easy plugging onto fine-stranded copper conductors, prevents damage and splicing. Design: cross section: 120 mm²; length without insulation L2: 27 mm; total length L1: 48 mm; D1: 16.7; S1: 0.45; S2: 0.7; D2: 20; insulation color: blue; weight per 100 pcs.~kg: 0.93; UL listed: -; PU/pc: 25.

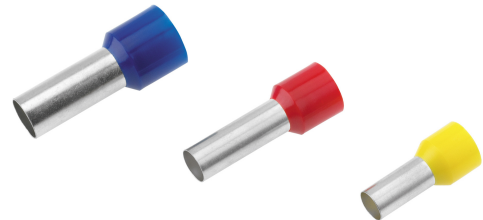

Length (mm)	220 mm
Width (mm)	190 mm
Height (mm)	30 mm
Weight (kg)	0,00928 kg

Attribute	Value
Nominal cross-section	120 mm ²
Surface protection	sonstige
Material	Kupfer
Color	blau
Insulated	Yes
Halogen-free	Yes
Strip goods	No
Total length	48 mm
Design	Standard
For short-circuit-proof cables	No
Insulation material	Polypropylen (PP)
Sleeve length	27 mm
With identification flag	No
AWG size	sonstige

GTIN: 4021103823781

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de