


**FERRULE INSULATED CROSS-SECTION/SLEEVE LENGTH 150.0 MM<sup>2</sup>/32 MM**
**Article number: 182380**

Insulated ferrules according to DIN 46228, part 4 and special dimensions. Technical data - Material: Cu-ETP according to DIN EN 13600 - Surface: electro-tinned - Insulation polypropylene - Temperature resistance -35°C to +105°C - For easy plugging onto fine-stranded copper conductors, prevents damage and splicing. Design: cross section: 150 mm<sup>2</sup>; length without insulation L2: 32 mm; total length L1: 58 mm; D1: 19; S1: 0.5; S2: 1; D2: 23; insulation color: yellow; weight per 100 pcs.~kg: 1.06; UL listed: -; PU/pc: 25.

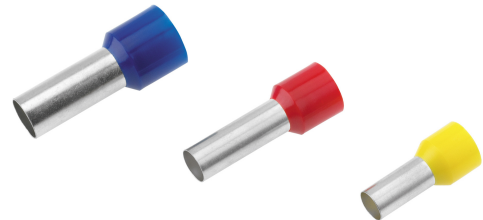

Length (mm) 220 mm  
 Width (mm) 190 mm  
 Height (mm) 60 mm  
 Weight (kg) 0,00106 kg

Attribute	Value
Nominal cross-section	150 mm <sup>2</sup>
Surface protection	sonstige
Material	Kupfer
Color	gelb
Insulated	Yes
Halogen-free	Yes
Strip goods	No
Total length	58 mm
Design	Standard
For short-circuit-proof cables	No
Insulation material	Polypropylen (PP)
Sleeve length	32 mm
With identification flag	No
AWG size	sonstige

GTIN: 4021103823804

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de