


**INSULATED TWIN WIRE-END FERRULES CROSS-SECTION/SLEEVE LENGTH 2 X 16.0 MM<sup>2</sup>/14 MM**
**Article number: 182424**

Insulated twin wire end ferrules. Technical data, material: Cu-ETP according to DIN EN 13600, surface: electro-tinned. Insulation polypropylene. Temperature resistance -35°C to +105°C. For easy processing of 2 fine stranded copper conductors, prevents damage and splicing. Color series 1. design: cross-section: 2x16 mm<sup>2</sup>, length without insulation L2: 14 mm; total length L1: 30 mm; D1: 8.3, S1: 0.2; S2: 0.4; D2: 9.6; insulation color: ivory; weight per 100 pcs:~kg: 0.13; PU/pc: 100.

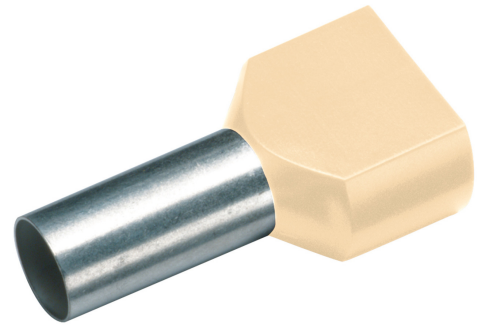

Length (mm)	220 mm
Width (mm)	190 mm
Height (mm)	22 mm
Weight (kg)	0,0013 kg

Attribute	Value
Nominal cross-section	16 mm <sup>2</sup>
Surface protection	verzinkt
Material	Kupfer
Color	blau
Insulated	Yes
Halogen-free	Yes
Strip goods	No
Total length	30 mm
Design	Zwillings-Aderendhülse
For short-circuit-proof cables	No
Insulation material	Polypropylen (PP)
Sleeve length	14 mm
With identification flag	No
AWG size	6

GTIN: 4021103824245

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de