


## AL-CU, STANDARD VERSION CRIMP CONNECTOR 70 - 25 MM<sup>2</sup>

**Article number: 183421**

AL-CU compression connector made of E-Al and E-Cu according to EN 13600, bare. For connections of CU-cables according to DIN 48201, ALU-cables according to DIN 48201, part 1 and ALU-ropes DIN EN 50182. Design: cross-section AL rm/sm: 70 mm<sup>2</sup>; cross-section AL se: 95 mm<sup>2</sup>; cross-section.: 25 mm<sup>2</sup>; Code number AL: 18; Code number CU: 10; AL: 11,2 mm; CU: 7 mm; Length: 79 mm; Weight CU kg/100: 0,89; Weight total kg/100: 3,95; Pressing- 7 mm: 3; Pressing- 5 mm: 6; Packs per piece: 4.

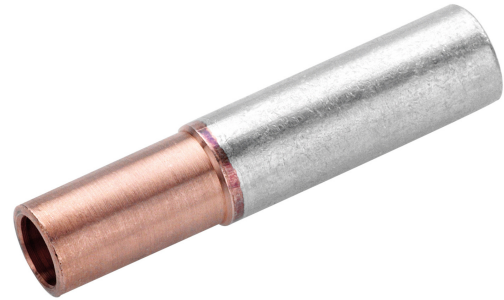

Length (mm)	79 mm
Width (mm)	18 mm
Height (mm)	18 mm
Weight (kg)	0,0395 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	70 mm <sup>2</sup> - 70 mm <sup>2</sup>
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	95 mm <sup>2</sup> - 95 mm <sup>2</sup>
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	95 mm <sup>2</sup>
Nominal copper cross-section	25 mm <sup>2</sup>

GTIN: 4021103834213

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de