


## AL/CU CRIMP CONNECTOR 95/70 QMM

### Article number: 183434

AL-CU compression connector made of E-Al and E-Cu in accordance with EN 13600, bare. For connecting CU cables to DIN 48201, ALU cables to DIN 48201, Part 1 and ALU cables to DIN EN 50182. Design: cross-section AL rm/sm: 95 mm<sup>2</sup>; cross-section AL se: 120 mm<sup>2</sup>; cross-section AL: 22; code number CU: 16; AL: 13.2 mm; CU: 13.2 mm; CU: 13.2 mm; CU: 13.2 mm.70 mm<sup>2</sup>; Code number AL: 22; Code number CU: 16; AL: 13.2 mm; CU: 11.5 mm; Length: 87 mm; Weight CU kg/100: 3.11 Weight total kg/100: 8.2; Compression- 7 mm: 3; Compression- 5 mm: 6; PU/unit: 1.

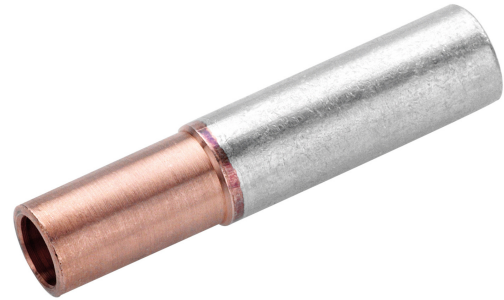

Length (mm)	87 mm
Width (mm)	22 mm
Height (mm)	22 mm
Weight (kg)	0,082 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	95 mm <sup>2</sup> - 95 mm <sup>2</sup>
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	120 mm <sup>2</sup> - 120 mm <sup>2</sup>
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	120 mm <sup>2</sup>
Nominal copper cross-section	70 mm <sup>2</sup>

GTIN: 4021103834343

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de