


AL/CU COMPRESSION CONNECTOR 150/95 QMM

Article number: 183455

AL-CU compression connector made of E-Al and E-Cu in accordance with EN 13600, bare. For connecting CU cables to DIN 48201, ALU cables to DIN 48201, Part 1 and ALU cables to DIN EN 50182. Design: cross-section AL rm/sm: 150 mm²; cross-section AL se: 185 mm²; cross-section AL: 25; code number CU: 18; AL: 16.3 mm; CU: 16.3 mm; CU: 95 mm².95 mm²; Code number AL: 25; Code number CU: 18; AL: 16.3 mm; CU: 13.5 mm; Length: 108 mm; Weight CU kg/100: 4.96; Total weight kg/100: 12.65; Compression- 7 mm: 3; Compression- 5 mm: 6; PU/pcs: 1.

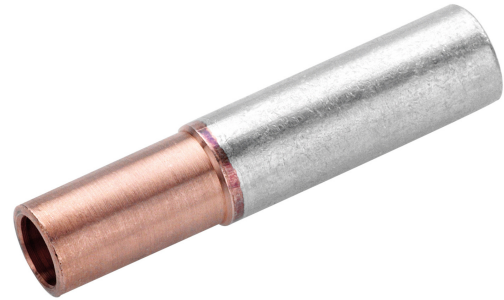

Length (mm)	108 mm
Width (mm)	25 mm
Height (mm)	25 mm
Weight (kg)	0,1265 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	150 mm ² - 150 mm ²
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	185 mm ² - 185 mm ²
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	185 mm ²
Nominal copper cross-section	95 mm ²

GTIN: 4021103834558

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de