


## AL/CU COMPRESSION CONNECTOR 185/50 QMM

### Article number: 183460

AL-CU compression connector made of E-Al and E-Cu according to EN 13600, bare. For connections of CU-cables according to DIN 48201, ALU-cables according to DIN 48201, part 1 and ALU-cables DIN EN 50182. Design: cross section AL rm/sm: 185 mm<sup>2</sup>; cross section AL se: 240 mm<sup>2</sup>; cross section.: 50 mm<sup>2</sup>; Code number AL: 28; Code number CU: 14; AL: 18,3 mm; CU: 10 mm; Length: 99 mm; Weight CU kg/100: 2,36; Weight total kg/100: 12,1; Pressing- 7 mm: 3; Pressing- 5 mm: 6; Packs per piece: 1.

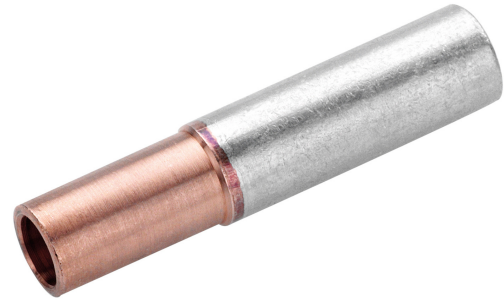

Length (mm)	99 mm
Width (mm)	28 mm
Height (mm)	28 mm
Weight (kg)	0,121 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	185 mm <sup>2</sup> - 185 mm <sup>2</sup>
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	240 mm <sup>2</sup> - 240 mm <sup>2</sup>
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	240 mm <sup>2</sup>
Nominal copper cross-section	50 mm <sup>2</sup>

GTIN: 4021103834602

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de