


AL/CU COMPRESSION CONNECTOR 185/120 QMM

Article number: 183464

AL-CU compression connector made of E-Al and E-Cu according to EN 13600, bare. For connections of CU-cables according to DIN 48201, ALU-cables according to DIN 48201, part 1 and ALU-cables DIN EN 50182. Design: cross-section AL rm/sm: 185 mm²; cross-section AL se: 240 mm²; cross-section.: 150 mm²; Code number AL: 28; Code number CU: 22; AL: 18,3 mm; CU: 17 mm; Length: 113 mm; Weight CU kg/100: 8,23; Weight total kg/100: 19,55; Pressing- 7 mm: 3; Pressing- 5 mm: 6; Packs per piece: 1.

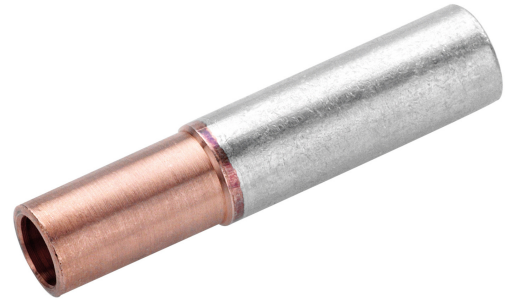

Length (mm)	113 mm
Width (mm)	28 mm
Height (mm)	28 mm
Weight (kg)	0,1955 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	185 mm ² - 185 mm ²
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	240 mm ² - 240 mm ²
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	240 mm ²
Nominal copper cross-section	150 mm ²

GTIN: 4021103834640

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de