


AL/CU CRIMP CONNECTOR 240/120 QMM

Article number: 183473

AL-CU compression connector made of E-Al and E-Cu according to EN 13600, bare. For connections of CU-cables according to DIN 48201, ALU-cables according to DIN 48201, part 1 and ALU-cables DIN EN 50182. Design: cross section AL rm/sm: 240 mm²; cross section AL se: 300 mm²; cross section.: 120 mm²; Code number AL: 32; Code number CU: 20; AL: 21 mm; CU: 15,5 mm; Length: 119 mm; Weight CU kg/100: 5,64; Weight total kg/100: 20,5; Pressing- 7 mm: 3; Pressing- 5 mm: 8; Packs per piece: 1.

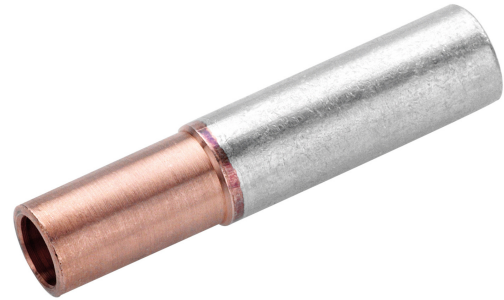

Length (mm)	119 mm
Width (mm)	32 mm
Height (mm)	32 mm
Weight (kg)	0,205 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	240 mm ² - 240 mm ²
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	300 mm ² - 300 mm ²
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	300 mm ²
Nominal copper cross-section	120 mm ²

GTIN: 4021103834732

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de