


## AL/CU CRIMP CONNECTOR 240/150 QMM

**Article number: 183474**

AL-CU compression connector made of E-Al and E-Cu according to EN 13600, bare. For connections of CU-cables according to DIN 48201, ALU-cables according to DIN 48201, part 1 and ALU-cables DIN EN 50182. design: cross section AL rm/sm: 240 mm<sup>2</sup>; cross section AL se: 300 mm<sup>2</sup>; cross section.: 150 mm<sup>2</sup>; Code number AL: 32; Code number CU: 22; AL: 21 mm; CU: 17 mm; Length: 124 mm; Weight CU kg/100: 8,23; Weight total kg/100: 23,3; Pressing- 7 mm: 3; Pressing- 5 mm: 8; Packs per piece: 1.

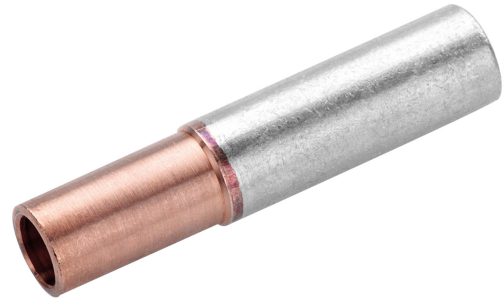

Length (mm)	124 mm
Width (mm)	32 mm
Height (mm)	32 mm
Weight (kg)	0,233 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	240 mm <sup>2</sup> - 240 mm <sup>2</sup>
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	300 mm <sup>2</sup> - 300 mm <sup>2</sup>
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	300 mm <sup>2</sup>
Nominal copper cross-section	150 mm <sup>2</sup>

GTIN: 4021103834749

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de