


AL/CU CRIMP CONNECTOR 300/300 QMM

Article number: 183484

AL-CU compression connector made of E-Al and E-Cu according to EN 13600, bare. For connections of CU-cables according to DIN 48201, ALU-cables according to DIN 48201, part 1 and ALU-ropes DIN EN 50182. Design: cross section AL rm/sm: 300 mm²; cross section AL se: 300 mm²; cross section AL: 300 mm²; cross section AL: 300 mm²; cross section AL: 300 mm²; cross section AL: 300 mm²; cross section AL: 300 mm²; cross section AL: 300 mm²; cross section AL: 300 mm²; Code number AL: 34; Code number CU: 32; AL: 23,5 mm; CU: 24,5 mm; Length: 134 mm; Weight CU kg/100: 16,1; Weight total kg/100: 41,7; Pressing 7 mm: 3; Pressing 5 mm: 8; Packs per unit: 1.

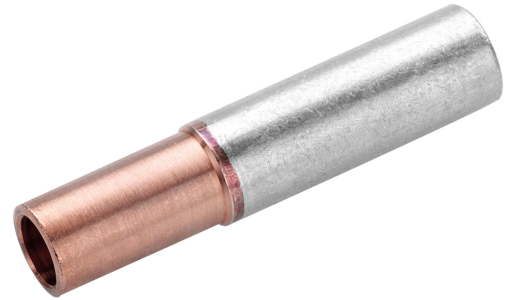

Length (mm)	134 mm
Width (mm)	34 mm
Height (mm)	34 mm
Weight (kg)	0,417 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	300 mm ² - 300 mm ²
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	400 mm ² - 400 mm ²
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	400 mm ²
Nominal copper cross-section	300 mm ²

GTIN: 4021103834848

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de