


**CRIMP CONNECTOR CU, DIN 46267, PART 1, CONDUCTOR CROSS-SECTION 150 MM<sup>2</sup>, LENGTH 81 MM, 1 PIECE****Article number: 183709**

Crimp connector Cu, DIN 46267, part 1. Technical data; Material: Cu-ETP according to DIN EN 13600; Surface: galvanic, other surfaces on request; for strain-relieved connections; especially suitable for fine-stranded conductors according to IEC 228; Annealed to copper hardness F 20. Design: cross-section: 150 mm<sup>2</sup>; code number: 22;  $\varnothing_i$ : 17;  $\varnothing_e$ : 23,5; L: 81; weight per 100 pcs.~kg: 14,86; compression: 7 mm: 2-2; compression: 5 mm: 4-4; PU/pc.: 1

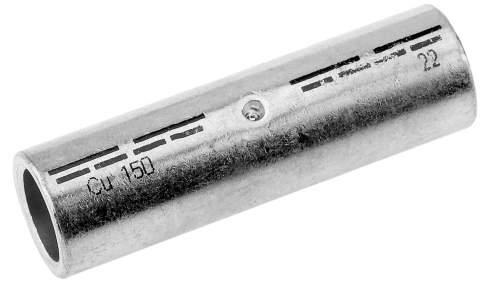

|             |           |
|-------------|-----------|
| Length (mm) | 81 mm     |
| Width (mm)  | 24 mm     |
| Height (mm) | 24 mm     |
| Weight (kg) | 0,1486 kg |

CIMCO Werkzeuge GmbH & Co. KG  
Hohenagener Straße 1 – 5  
42855 Remscheid  
Telefon +49 2191 3718-01  
info@cimco.de • cimco.de

| Attribute                                     | Value                                     |
|---|---|
| Surface protection                            | verzinkt                                  |
| Material                                      | Kupfer                                    |
| Execution                                     | DIN-Ausführung                            |
| Connection type                               | Stoßverbinder                             |
| Suitable for solid conductors                 | Yes                                       |
| Suitable for stranded conductors              | Yes                                       |
| Suitable for fine-stranded conductors         | Yes                                       |
| Sleeve shape                                  | lang                                      |
| Insulation                                    | ohne                                      |
| Nominal cross-section                         | 150 mm <sup>2</sup> - 150 mm <sup>2</sup> |
| For tensile strength connections              | No  |
| Suitable for round conductors                 | Yes                                       |
| Suitable for high temperatures (up to 650 °C) | No  |
| Suitable for flat conductors                  | No  |
| Suitable for enameled wire                    | No  |
| Oil stop/center bar                           | No  |
| Voltage series                                | bis 35 kV                                 |
| Number of branches                            | 2   |
| Rated current                                 | - A                                       |

GTIN: 4021103837092

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de