


## AL COMPRESSION CONNECTOR DIN 46267, PART 2

### Article number: 183866

AL compression connector DIN 46267, part 2 made of E-Al, bare. For round-pressed sm/se sector conductors. Design: Cross-section rm/sm: 185 mm<sup>2</sup>; Cross-section se: 240 mm<sup>2</sup>; Code number: 28; Inside Ø: 18.3 mm; Length: 125 mm; Weight kg/100: 14.3; Crimping 7 mm: 3-3; Crimping 5 mm: 7-7; PU/unit: 1

Length (mm)	125 mm
Width (mm)	28 mm
Height (mm)	28 mm
Weight (kg)	0,143 kg

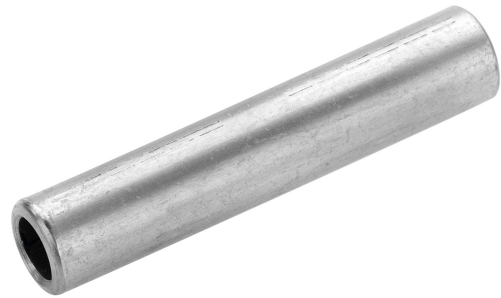

Attribute	Value
Material	Aluminium
Nominal cross-section aluminum, RM/SM	185 mm <sup>2</sup> - 185 mm <sup>2</sup>
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	240 mm <sup>2</sup> - 240 mm <sup>2</sup>
For tensile strength connections	No
Oil stop/center bar	No
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	- mm <sup>2</sup>
Nominal copper cross-section	- mm <sup>2</sup>

GTIN: 4021103838662

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de