


**AL-CU, STANDARD VERSION COMPRESSION CABLE LUG 50 MM<sup>2</sup> RM/SM, 70 MM<sup>2</sup> SE, M 10**
**Article number: 183918**

AL-CU compression cable lugs made of E-Al and E-Cu according to EN 13600, bare, longitudinally sealed with solid CU screw-on lug. Tube dimensions according to DIN 46329, with press markings. For screwing ALU connections onto CU rails. For strain-relieved connections of AL cables according to DIN 48201, part 1 and AL ropes according to DIN EN 50182. For round-pressed sector conductors. Cross-section rm/sm: 50 mm<sup>2</sup>; cross-section se: 70 mm<sup>2</sup>; bolt Ø: M10; code number: 16; D1: 9.8 mm; D2: 10.5 mm; W: 25 mm; L: 72 mm; wt. total kg/100: 4.3; compression 7 mm: 3; compression 5 mm: 5; PU/pc.: 10.

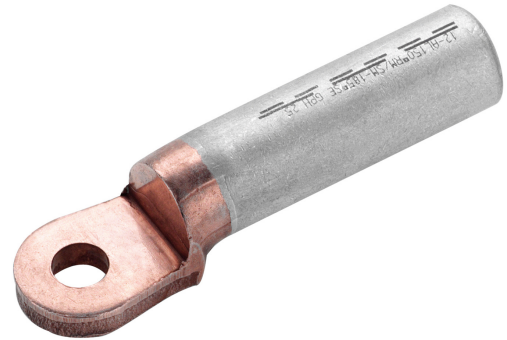

Length (mm)	72 mm
Width (mm)	25 mm
Height (mm)	16 mm
Weight (kg)	0,043 kg

Attribute	Value
Connection thread dimension (metric)	10
Number of fixing holes	1
Code number	16
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	50 mm <sup>2</sup> - 50 mm <sup>2</sup>
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Longitudinal density	Yes
Corresponds to DIN	Yes
Nominal cross-section aluminum, SE	70 mm <sup>2</sup> - 70 mm <sup>2</sup>
Sleeve shape	kurz
St nominal cross-section	- mm <sup>2</sup>

GTIN: 4021103839188

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de