


**AL-CU, STANDARD VERSION COMPRESSION CABLE LUG 95 MM<sup>2</sup> RM/SM, 120 MM<sup>2</sup> SE, M 16**
**Article number: 183930**

AL-CU compression cable lugs made of E-Al and E-Cu according to EN 13600, bare, longitudinally sealed with solid CU screw-on lug. Tube dimensions according to DIN 46329, with press markings. For screwing ALU connections onto CU rails. For strain-relieved connections of AL cables according to DIN 48201, part 1 and AL ropes according to DIN EN 50182. For round-pressed sector conductors. Cross-section rm/sm: 95 mm<sup>2</sup>; cross-section se: 120 mm<sup>2</sup>; bolt Ø: M16; code number: 22; D1: 13.2 mm; D2: 17 mm; W: 30 mm; L: 85 mm; wt. total kg/100: 10.5; compression 7 mm: 3; compression 5 mm: 6; pack per unit: 10.

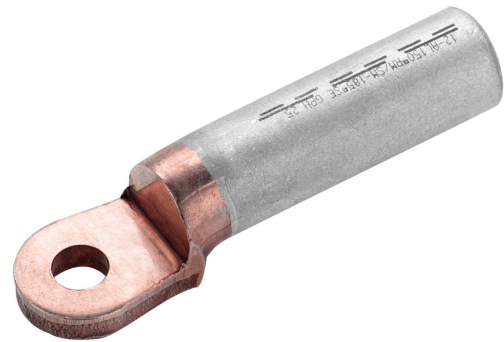

Length (mm)	85 mm
Width (mm)	30 mm
Height (mm)	22 mm
Weight (kg)	0,105 kg

Attribute	Value
Connection thread dimension (metric)	16
Number of fixing holes	1
Code number	22
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	95 mm <sup>2</sup> - 95 mm <sup>2</sup>
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Longitudinal density	Yes
Corresponds to DIN	Yes
Nominal cross-section aluminum, SE	120 mm <sup>2</sup> - 120 mm <sup>2</sup>
Sleeve shape	kurz
St nominal cross-section	- mm <sup>2</sup>

GTIN: 4021103839300

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de