


AL-CU, STANDARD VERSION COMPRESSION CABLE LUG 185 MM² RM/SM, 240 MM² SE, M 16
Article number: 183944

AL-CU compression cable lugs made of E-Al and E-Cu according to EN 13600, bare, longitudinally sealed with solid CU screw-on lug. Tube dimensions according to DIN 46329, with press markings. For screwing ALU connections onto CU rails. For strain-relieved connections of AL cables according to DIN 48201, part 1 and AL ropes according to DIN EN 50182. For round-pressed sector conductors. Cross-section rm/sm: 185 mm²; cross-section se: 240 mm²; bolt Ø: M16; code number: 28; D1: 18.3 mm; D2: 17 mm; W: 30 mm; L: 105 mm; wt. tot. kg/100: 21.4; compression 7 mm: 3; compression 5 mm: 7; PU/pc.: 5.

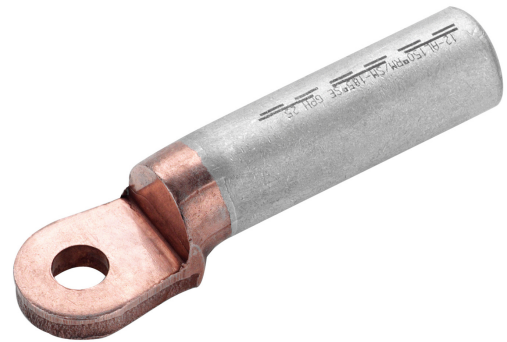

Length (mm)	105 mm
Width (mm)	30 mm
Height (mm)	28 mm
Weight (kg)	0,214 kg

Attribute	Value
Connection thread dimension (metric)	16
Number of fixing holes	1
Code number	28
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	185 mm ² - 185 mm ²
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Longitudinal density	Yes
Corresponds to DIN	Yes
Nominal cross-section aluminum, SE	240 mm ² - 240 mm ²
Sleeve shape	kurz
St nominal cross-section	- mm ²

GTIN: 4021103839447

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de