


HEAT-SHRINK TUBING 2:1, TRANSPARENT, THIN-WALLED, Ø 5.0/2.3 MM, LENGTH 9.50 M
Article number: 184252

Polyolefin heat shrinkable tubing thin wall 2:1; transparent, halogen free and flexible, non flame retardant (VW-1/UL224). Technical data: Longitudinal shrinkage <5%, continuous temperature: -55 to 105°C, shrink temperature: 105°C, dielectric strength: 15 kV/mm (IEC243), volume resistivity: 10¹⁴ OhmxcM (IEC93), tensile strength: 10.4 MPa (ASTM D2671), elongation at break: 200% (ASTM D2671). Type: Ø-before: 5.0 mm; Ø-after: 2.3 mm; Color: transparent; Wall thickness: 0.56 mm; Length: 9.50 m; 1 box.

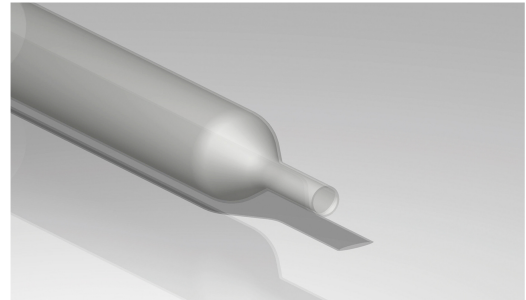

Length (mm)	190 mm
Width (mm)	150 mm
Height (mm)	50 mm
Weight (kg)	0,125 kg

Attribute	Value
Length	9.5 m
Material	Polyolefine (PO-X)
Color	farblos
Execution	dünnwandig
Halogen-free	Yes
Transparent	Yes
Type	Warmshrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	19.63 mm ² - 19.63 mm ²
Shrinkage rate	2:1
With inside adhesive	No
Inner diameter after shrinkage	2.3 mm
Inner diameter before shrinkage	5 mm
Printable	No
Wall thickness after shrinkage	0.56 mm

GTIN: 4021103068601

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de