


HEAT-SHRINK TUBING 2:1, TRANSPARENT, THIN-WALLED, Ø 9.5/4.5 MM, LENGTH 6.50 M
Article number: 184254

Polyolefin heat shrinkable tubing thin wall 2:1; transparent, halogen free and flexible, non flame retardant (VW-1/UL224). Technical data: Longitudinal shrinkage <5%, Continuous temperature: -55 to 105°C, Shrink temperature: 105°C, Dielectric strength: 15 kV/mm (IEC243), Volume resistivity: 10¹⁴ Ohm x cm (IEC93), Tensile strength: 10.4 MPa (ASTM D2671), Elongation at break: 200% (ASTM D2671). Type: Ø-before: 9.5 mm; Ø-after: 4.5 mm; Color: transparent; Wall thickness: 0.56 mm; Length: 6.50 m; 1 box.

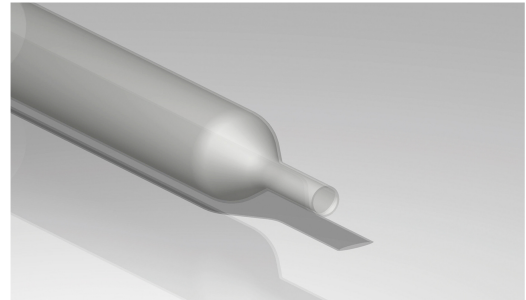

Length (mm)	190 mm
Width (mm)	150 mm
Height (mm)	50 mm
Weight (kg)	0,148 kg

Attribute	Value
Length	6.5 m
Material	Polyolefine (PO-X)
Color	farblos
Execution	dünnwandig
Halogen-free	Yes
Transparent	Yes
Type	Warmshrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	70.88 mm ² - 70.88 mm ²
Shrinkage rate	2:1
With inside adhesive	No
Inner diameter after shrinkage	4.5 mm
Inner diameter before shrinkage	9.5 mm
Printable	No
Wall thickness after shrinkage	0.56 mm

GTIN: 4021103069899

 CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de