


HEAT-SHRINK TUBING 3:1, BLACK, RAL 9011, THIN-WALLED, Ø 1.5/0.5 MM, LENGTH 15 M
Article number: 184260

Polyolefin heat shrinkable tubing thin wall 3:1; halogen free and flexible, flame retardant (VW-1/UL224). Technical data: Longitudinal shrinkage <5%; continuous temperature: -45 to 125°C, shrink temperature: 120°C, dielectric strength: 15 kV/mm (IEC243), volume resistivity: 1014 Ohm x cm (IEC93), tensile strength: 10.4 MPa (ASTM D2671), elongation at break: 200% (ASTM D2671). Finish: Ø-before: 1.5 mm; Ø-after: 0.5 mm; Color: black; Wall thickness: 0.45 mm; Length: 15 m; 1 box.

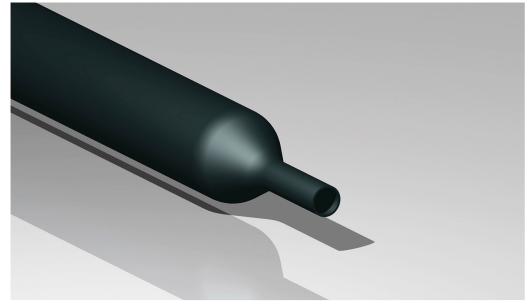

Length (mm)	190 mm
Width (mm)	150 mm
Height (mm)	50 mm
Weight (kg)	0,098 kg

Attribute	Value
Length	15 m
Material	Polyolefine (PO-X)
Color	schwarz
Execution	dünnwandig
Halogen-free	Yes
Transparent	No
Type	Warmschrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	1.77 mm ² - 1.77 mm ²
Shrinkage rate	3:1
With inside adhesive	No
Inner diameter after shrinkage	0.5 mm
Inner diameter before shrinkage	1.5 mm
Printable	No
Wall thickness after shrinkage	0.45 mm

GTIN: 4021103069974

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de