


## HEAT-SHRINK TUBING 3:1, BLACK, RAL 9011, THIN-WALLED, WITH INTERNAL ADHESIVE, Ø 6.4/2.2 MM, LENGTH 1.22 M

**Article number: 184281**

Polyolefin heat shrinkable tubing thin wall 3:1; black, halogen free and flexible, flame retardant (VW-1/UL224), with inner adhesive. Technical data: Longitudinal shrinkage <8%; continuous temperature: -45 to 125°C, shrink temperature: 120°C, dielectric strength: 2.5 kV/mm (UL224), volume resistivity: 1014 Ohm x cm (IEC93), tensile strength: 10.4 MPa (ASTM D2671), elongation at break: 300% (ASTM D2671). Design: Ø-before: 6.4 mm; Ø-after: 2.2 mm; color: black; wall thickness: 0.80 mm; length: 1.22 m; 5 pieces. Other heat shrinkable tubings available on request!

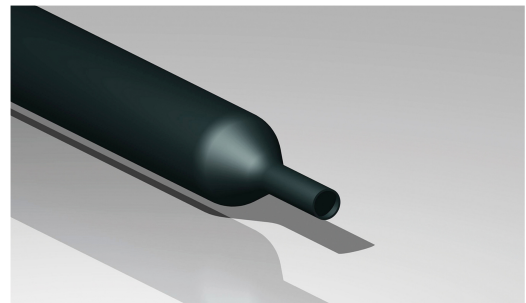

Length (mm)	1300 mm
Width (mm)	205 mm
Height (mm)	160 mm
Weight (kg)	1,15 kg

Attribute	Value
Length	1.22 m
Material	Polyolefine (PO-X)
Color	schwarz
Execution	dünnwandig
Halogen-free	Yes
Transparent	No
Type	Warmschrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	32.17 mm <sup>2</sup> - 32.17 mm <sup>2</sup>
Shrinkage rate	3:1
With inside adhesive	Yes
Inner diameter after shrinkage	2.2 mm
Inner diameter before shrinkage	6.4 mm
Printable	No
Wall thickness after shrinkage	0.65 mm

GTIN: 4021103068809

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de