


**INSULATED WIRE END FERRULE 2.5 MM<sup>2</sup>/8 MM, FR DIN, BLUE**
**Article number: 187016**

Insulated wire end ferrules to DIN 46228-4, color series DIN, made of CU-ETP to DIN EN 13600, tin-plated, with polypropylene insulation, suitable for fine-stranded copper conductors of classes 5 and 6 to DIN EN 60228. The ferrules are temperature-resistant up to 105 °C. Technical data: Nominal cross-section (mm<sup>2</sup>): 2.5 | Insulation color: blue | d1: 2.2 | d2: 4.2 | l1: 14 | l2: 8 | S1: 0.15 | S2: 0.25 | Weight per 100 pieces: approx. 0.014 kg | PU/pc: 100.

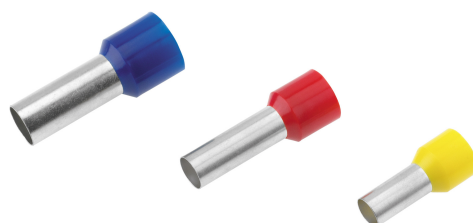

|             |            |
|-------------|------------|
| Length (mm) | 14 mm      |
| Width (mm)  | 4,5 mm     |
| Height (mm) | 14 mm      |
| Weight (kg) | 0,00014 kg |

| Attribute                      | Value               |
|--------------------------------|---------------------|
| Insulated material             | Yes                 |
| Surface protection             | Kupfer verzinkt     |
| Design                         | Standard            |
| nominal cross-section          | 2.5 mm <sup>2</sup> |
| tube length                    | 8 mm                |
| total length                   | 14 mm               |
| Insulation material            | Polypropylen (PP)   |
| Halogen-free                   | Yes                 |
| Color                          | blau                |
| For short-circuit-proof cables | No                  |
| With identification flag       | No                  |
| Strip goods                    | No                  |

GTIN: 4021103112120

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de