


**CRIMP CONNECTOR CU, DIN 46267, PART 1, CONDUCTOR CROSS-SECTION 35 MM<sup>2</sup>, LENGTH 51 MM, 1 PIECE**
**Article number: 183704**

Crimp connector Cu, DIN 46267, part 1. Technical data; Material: Cu-ETP according to DIN EN 13600; Surface: galvanic, other surfaces on request; for strain-relieved connections; especially suitable for fine-stranded conductors according to IEC 228; Annealed to copper hardness F 20. Design: cross section: 35 mm<sup>2</sup>; code number: 12; Øi: 8,2; Øe: 12,5; L: 51; weight per 100 pcs.~kg: 3,15; compression: 7 mm: 1-1; compression: 5 mm: 2-2; PU/pc.: 1

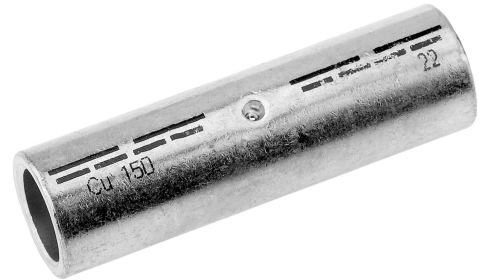

Attribute	Value
Surface protection	verzinkt
Material	Kupfer
Execution	DIN-Ausführung
Connection type	Stoßverbinder
Suitable for solid conductors	Yes
Suitable for stranded conductors	Yes
Suitable for fine-stranded conductors	Yes
Sleeve shape	lang
Insulation	ohne
Nominal cross-section	35 - 35
For tensile strength connections	No
Suitable for round conductors	Yes
Suitable for high temperatures (up to 650 °C)	No
Suitable for flat conductors	No
Suitable for enameled wire	No
Oil stop/center bar	No
Voltage series	bis 35 kV
Number of branches	2

GTIN: 4021103837047

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de