


AL/CU COMPRESSION CONNECTOR 70/35 QMM

Article number: 183422

AL-CU compression connector made of E-Al and E-Cu in accordance with EN 13600, bare. For connecting CU cables to DIN 48201, ALU cables to DIN 48201, Part 1 and ALU cables to DIN EN 50182. Version: cross-section AL rm/sm: 70 mm²; cross-section AL se: 95 mm²; cross-section.35 mm²; Code number AL: 18; Code number CU: 12; AL: 11.2 mm; CU: 8.2 mm; Length: 79 mm; Weight CU kg/100: 1.62; Total weight kg/100: 4.9; Compression-7 mm: 3; Compression- 5 mm: 6; PU/unit: 1

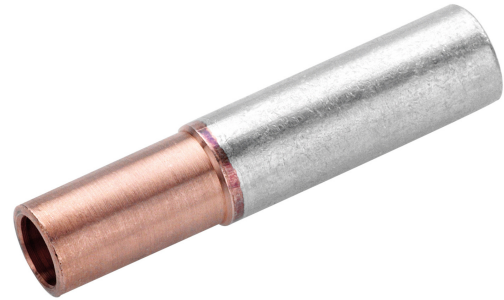

Length (mm)	79 mm
Width (mm)	18 mm
Height (mm)	18 mm
Weight (kg)	0,049 kg

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	70 mm ² - 70 mm ²
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	95 mm ² - 95 mm ²
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	95 mm ²
Nominal copper cross-section	35 mm ²

GTIN: 4021103834220

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de