


AL COMPRESSION CABLE LUG DIN 46329, 1 PIECE

Article number: 183631

AL compression cable lugs DIN 46329, made of E-Al, bare, longitudinally sealed design with oil stop. Design: Cross-section rm/sm : 120 mm²; Cross-section se : 150 mm²; Pin \varnothing : M10; Code number: 22; D1: 14.7 mm; D2: 10.5 mm; A: 56 mm; B: 30 mm; L: 80 mm; Weight per 100 pcs ~kg: 5.95; Crimping 7 mm: 3; Crimping 5 mm: 6; acc. to DIN: x; acc. to PU/pc.: 1

| | |
|-------------|-----------|
| Length (mm) | 80 mm |
| Width (mm) | 30 mm |
| Height (mm) | 30 mm |
| Weight (kg) | 0,0595 kg |

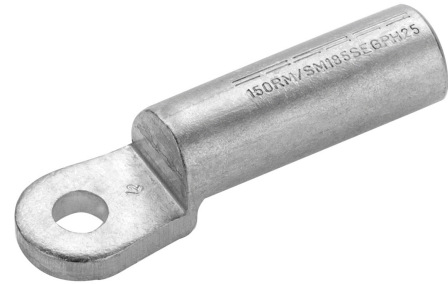

| Attribute | Value |
|---------------------------------------|---|
| Connection thread dimension (metric) | 10 |
| Number of fixing holes | 1 |
| Code number | 32 |
| Material | Aluminium |
| Color | sonstige |
| Nominal cross-section aluminum, RM/SM | 120 mm ² - 120 mm ² |
| Suitable for Al/St ropes | No |
| Cross-sectional shape | rund |
| Longitudinal density | Yes |
| Corresponds to DIN | Yes |
| Nominal cross-section aluminum, SE | 150 mm ² - 150 mm ² |
| Sleeve shape | kurz |
| St nominal cross-section | - mm ² |

GTIN: 4021103836316

CIMCO Werkzeuge GmbH & Co. KG
 Hohenagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de