


CRIMP CONNECTOR CU, DIN 46267, PART 1, CONDUCTOR CROSS-SECTION 120 MM², LENGTH 71 MM, 1 PIECE
Article number: 183708

Crimp connector Cu, DIN 46267, part 1. Technical data; Material: Cu-ETP according to DIN EN 13600; Surface: galvanic, other surfaces on request; for strain-relieved connections; especially suitable for fine-stranded conductors according to IEC 228; Annealed to copper hardness F 20. Design: cross section: 120 mm²; code number: 20; Øi: 15,5; Øe: 21; L: 71; weight per 100 pcs.~kg: 9,92; compression: 7 mm: 2-2; compression: 5 mm: 4-4; PU/pc.: 1

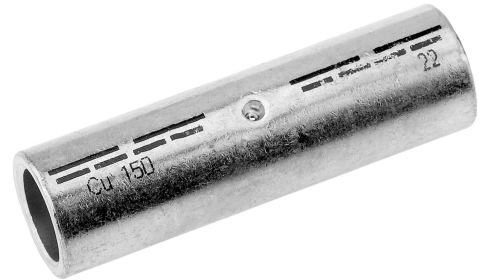

Attribute	Value
Surface protection	verzinkt
Material	Kupfer
Execution	DIN-Ausführung
Connection type	Stoßverbinder
Suitable for solid conductors	Yes
Suitable for stranded conductors	Yes
Suitable for fine-stranded conductors	Yes
Sleeve shape	lang
Insulation	ohne
Nominal cross-section	120 - 120
For tensile strength connections	No
Suitable for round conductors	Yes
Suitable for high temperatures (up to 650 °C)	No
Suitable for flat conductors	No
Suitable for enameled wire	No
Oil stop/center bar	No
Voltage series	bis 35 kV
Number of branches	2

GTIN: 4021103837085

CIMCO Werkzeuge GmbH & Co. KG
 Hohenagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de