


HEAT-SHRINK TUBING 2:1, BLACK, RAL 9011, THIN-WALLED, Ø 31.5/15.0 MM, LENGTH 5 M
Article number: 181628

Polyolefin heat shrink tubing, thin wall design 2:1, black, halogen free and flexible, flame retardant (VW-1/UI224). Technical data: Longitudinal shrinkage: < 5%, Continuous temperature: -55 to 125°C, Shrink temperature: 125°C, Dielectric strength: 15 kV/mm (IEC243), Volume resistivity: 10¹⁴ ohms x cm (IEC93), Tensile strength: 10.4 MPa (ASTM D2671).
Elongation at break: 200 % (ASTM D2671) Ø- in mm; before: 31,5; after: 15,0; Color: black; Wall thickness: 1,00 mm; Length: 5 m; Packing unit: 1 piece

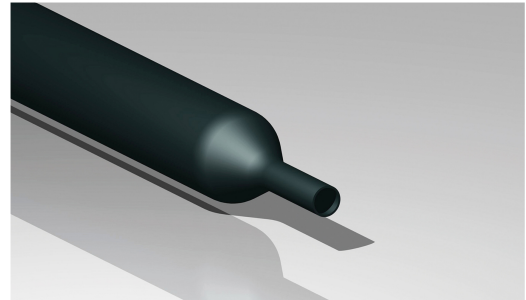

Length (mm) 0 mm
Width (mm) 0 mm
Height (mm) 0 mm
Weight (kg) 0,076 kg

Attribute	Value
Length	5 m
Material	Polyolefine (PO-X)
Color	schwarz
Execution	dünnwandig
Halogen-free	Yes
Transparent	No
Type	Warmschrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	779.31 mm ² - 779.31 mm ²
Shrinkage rate	2:1
With inside adhesive	No
Inner diameter after shrinkage	15 mm
Inner diameter before shrinkage	31.5 mm
Printable	No
Wall thickness after shrinkage	1 mm

GTIN: 4021103067390

 CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de