


AL/CU CRIMP CONNECTOR 95/120 QMM

Article number: 183436

AL-CU compression connector made of E-Al and E-Cu in accordance with EN 13600, bare. 120 mm²; Code number AL: 22; Code number CU: 20; AL: 13.2 mm; CU: 15.5 mm; Length: 95 mm; Weight CU kg/100: 5.64; Total weight kg/100: 11.55; Compression- 7 mm: 3; Compression- 5 mm: 6; PU/pc: 1.

| | |
|-------------|-----------|
| Length (mm) | 95 mm |
| Width (mm) | 22 mm |
| Height (mm) | 22 mm |
| Weight (kg) | 0,1155 kg |

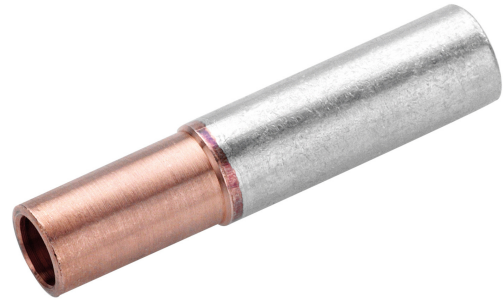

| Attribute | Value |
|---------------------------------------|---|
| Material | Aluminium/Kupfer |
| Nominal cross-section aluminum, RM/SM | 95 mm ² - 95 mm ² |
| Suitable for Al/St ropes | No |
| Cross-sectional shape | rund |
| Nominal cross-section aluminum, SE | 120 mm ² - 120 mm ² |
| For tensile strength connections | No |
| Oil stop/center bar | Yes |
| Suitable for Aldrey ropes | No |
| Voltage series | 0,6/1 kV |
| Connection as copper bolt | No |
| Reduced nominal Al cross-section | 120 mm ² |
| Nominal copper cross-section | 120 mm ² |

GTIN: 4021103834367

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de