


## AL/CU CRIMP CONNECTOR 120/120 QMM

### Article number: 183444

AL-CU compression connector made of E-Al and E-Cu in accordance with EN 13600, bare. 120 mm<sup>2</sup>; Code number AL: 22; Code number CU: 20; AL: 14.7 mm; CU: 15.5 mm; Length: 97 mm; Weight CU kg/100: 5.64; Total weight kg/100: 10.28; Compression- 7 mm: 3; Compression- 5 mm: 6; PU/pcs: 1.

Length (mm)	97 mm
Width (mm)	22 mm
Height (mm)	22 mm
Weight (kg)	0,1028 kg

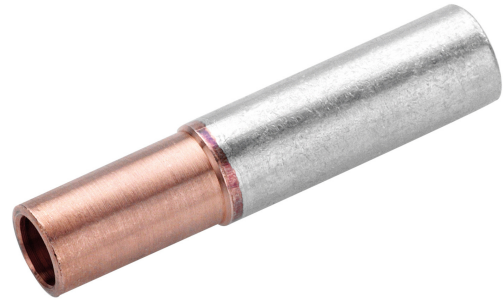

Attribute	Value
Material	Aluminium/Kupfer
Nominal cross-section aluminum, RM/SM	120 mm <sup>2</sup> - 120 mm <sup>2</sup>
Suitable for Al/St ropes	No
Cross-sectional shape	rund
Nominal cross-section aluminum, SE	150 mm <sup>2</sup> - 150 mm <sup>2</sup>
For tensile strength connections	No
Oil stop/center bar	Yes
Suitable for Aldrey ropes	No
Voltage series	0,6/1 kV
Connection as copper bolt	No
Reduced nominal Al cross-section	150 mm <sup>2</sup>
Nominal copper cross-section	120 mm <sup>2</sup>

GTIN: 4021103834442

CIMCO Werkzeuge GmbH & Co. KG  
 Hohenhagener Straße 1 – 5  
 42855 Remscheid  
 Telefon +49 2191 3718-01  
 info@cimco.de • cimco.de