


HEAT-SHRINK TUBING 3:1, BLACK, RAL 9011, THIN-WALLED, Ø 100.0/33.0 MM, LENGTH 1 M
Article number: 184270

Polyolefin heat shrinkable tubing thin wall 3:1; halogen free and flexible, flame retardant (VW-1/UL224). Technical data: Longitudinal shrinkage <5%; continuous temperature: -45 to 125°C, shrink temperature: 120°C, dielectric strength: 15 kV/mm (IEC243), volume resistivity: 1014 Ohm x cm (IEC93), tensile strength: 10.4 MPa (ASTM D2671), elongation at break: 200% (ASTM D2671). Finish: Ø-before: 100.0 mm; Ø-after: 33.0 mm; Color: black; Wall thickness: 2.60 mm; Length: 1 m; 1 piece.

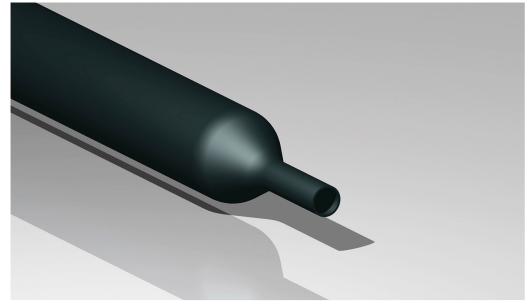

Length (mm)	1000 mm
Width (mm)	0 mm
Height (mm)	0 mm
Weight (kg)	0,454 kg

Attribute	Value
Length	1 m
Material	Polyolefine (PO-X)
Color	schwarz
Execution	dünnwandig
Halogen-free	Yes
Transparent	No
Type	Warmschrumpf
Operating temperature	-45 °C - 125 °C
Nominal cross-section	7853.98 mm ² - 7853.98 mm ²
Shrinkage rate	3:1
With inside adhesive	No
Inner diameter after shrinkage	33 mm
Inner diameter before shrinkage	100 mm
Printable	No
Wall thickness after shrinkage	2.6 mm

GTIN: 4021103068762

CIMCO Werkzeuge GmbH & Co. KG
 Hohenhagener Straße 1 – 5
 42855 Remscheid
 Telefon +49 2191 3718-01
 info@cimco.de • cimco.de